



5" /6" LED Retrofit Recessed Downlight with Multiple CCT

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------


DESCRIPTION

Available in 5"/6" and featuring color tunable technology that lets the user choose between 3000K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



TUNABLE 3-1 CCT SELECTOR

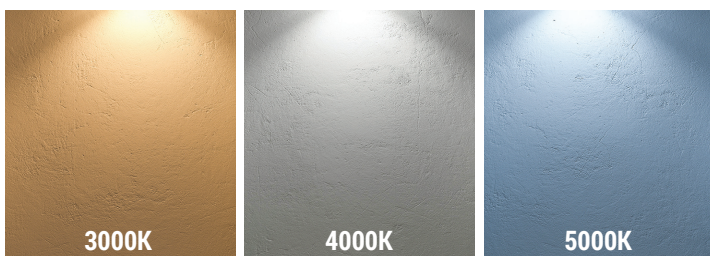

Easily flip the switch for desired CCT. It's that simple!

CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Standard industry torsion springs adjust to fit 5" and 6" compatible housings. Standard gasket included to ensure proper seal E26/GU24 base.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

CERTIFICATION

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	12W
LUMENS	1040 lumens
EFFICACY	87 lm/W
VOLTAGE	AC120V
POWER FREQUENCY	50/60 Hz
CCT	3000K 4000K 5000K
CRI	Ra>90
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited






5" / 6" LED Retrofit Recessed Downlight with Multiple CCT


Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------



Easily flip the switch for desired CCT.

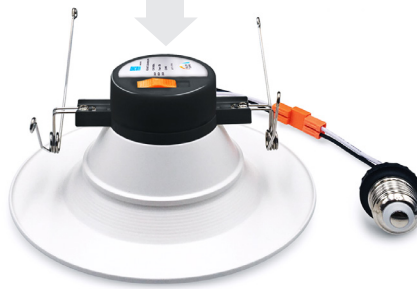

DIMENSION

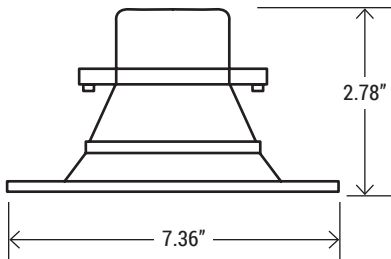

- Fits most 5" & 6" recessed housings
- Sealing gasket standard

ACCESSORY



E26 Adapter included
for easy retrofitting

COMPATIBLE DIMMERS

LUTRON	LEVITON
<ul style="list-style-type: none">• CT-600PR• MSCL-0P153MH• DVWCL-153PH• TGCL-153PR• MA-RR• DVCL-153PR• SCL-153PR• P-PKG1W-WH-R• MACL-153MH	<ul style="list-style-type: none">• R00-RNL06-TW• R50-IPL06-10M

PHOTOMETRY

Fixture photometry has been conducted accredited testing laboratory in accordance with IESNA LM79-08.

